

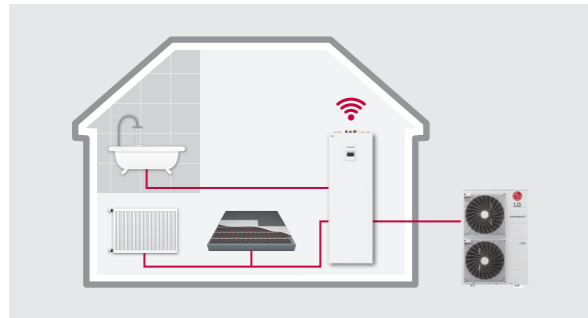


THERMA V™ R32

R32 HYDROSPLIT IWT



Energy Label

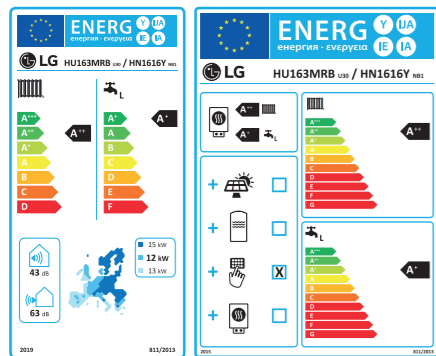


* 16kW 30 model.
* A+++ to D scale.

R32 Hydrosplit IWT Introduction

The LG THERMA V Hydrosplit series separates the Indoor unit (IDU) and outdoor unit (ODU), connecting them via water pipes. The unit's heat exchanger is located within the ODU, reducing the risk of indoor refrigerant leakage. THERMA V R32 Hydrosplit IWT is a domestic hot water supply, space heating and cooling solution that conveniently combines an indoor hot water tank with a separate outdoor unit.


Key Components

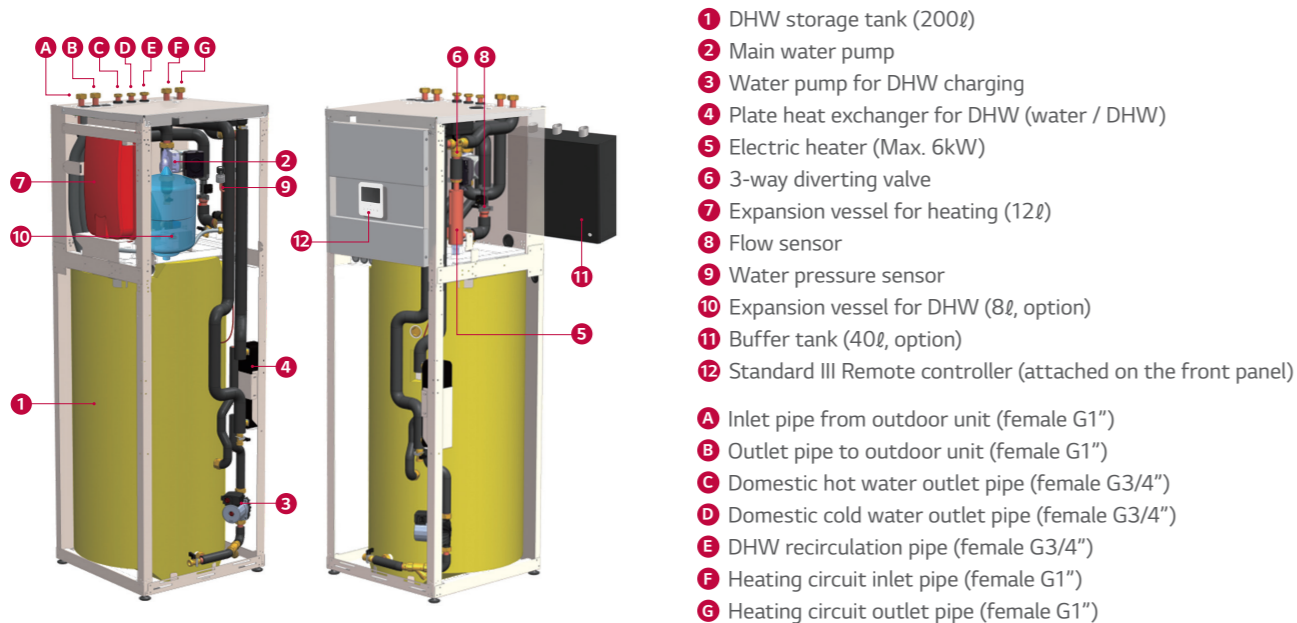


Excellent Performance & Efficiency



User Convenience

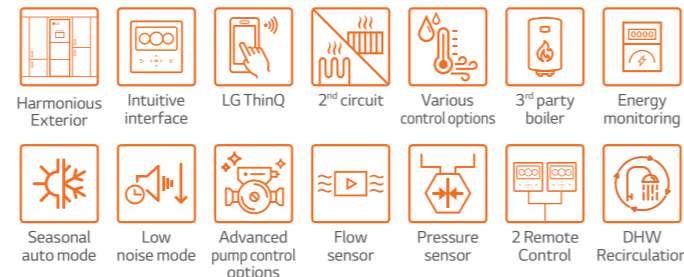

Easy Installation & Maintenance

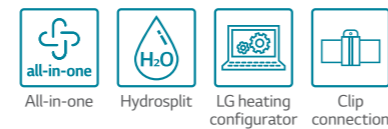

* Detailed description for each function is presented on page 28 - 35.

Hydrosplit Concept

The THERMA V R32 Hydrosplit IWT connects an IDU and ODU by water pipes due to the heat exchanger's location in the outdoor unit, thus reducing the risk of indoor refrigerant leakage.




Sophisticated and Harmonious Exterior

The THERMA V R32 Hydrosplit IWT indoor unit can be installed in multiple indoor spaces, to include the utility or laundry room, garage or kitchen due to its sleek design.



Save Space and Time

Compared with conventional system, easy & quick installation is possible and smaller spaces are required for installation.

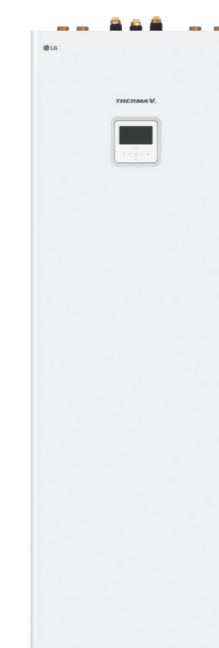

All in One

- Small footprint for product installation
- Quick & easy installation
- DHW tank (200ℓ) & hydronic component integration
- Integrated max. 6kW back up heater
- Integrated expansion tank for heating (12ℓ)
- Integrated buffer tank (40ℓ) & expansion tank for DHW circuit (8ℓ) (Optional)

PRODUCT SPECIFICATION

R32 Hydrosplit IWT (Integrated Water Tank)



Indoor Unit
HN1616Y NB1

Outdoor Unit

HN121MRB U30 / HU123MRB U30
HN141MRB U30 / HU143MRB U30
HN161MRB U30 / HU163MRB U30



Features

- Water pipes connects IDU & ODU
- SCOP up to 4.60 (Average climate / Low temp. application) : A+++
SCOP up to 3.50 (Average climate / Mid temp. application) : A++
SCOP_{DHW} 2.74 (water heating efficiency 120%, profile L) : A+
- COP up to 5.04 (Outdoor air 7°C / Leaving water 35°C)
- DHW tank (200ℓ) & hydronic component integration
- Integrable buffer tank (40ℓ) & expansion tank for DHW circuit (8ℓ) (optional)
- 100% heating capacity at -7 °C OAT (@ LWT 35°C)
- Wide operation range (ambient : -25 ~ 35°C / water side : 15 ~ 65°C)
- Built-in water flow & pressure sensors to monitor real-time water circuit
- R32 refrigerant with reduced global warming potential (GWP)
- R1 compressor
- Black Fin heat exchanger
- LG ThinQ
- KEYMARK / EHPA (for Germany, Austria) / EUROVENT certification

* Only the outdoor units are registered in EHPA certification.

Model Line-up

Category	Unit	Model Name		
		Capacity (kW)		
		12.0	14.0	16.0
1 Phase Model 220 - 240V, 1Ø, 50Hz	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30
	Indoor Unit	HN1616Y NB1		
3 Phase Model 380 - 415V, 3Ø, 50Hz	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30
	Indoor Unit	HN1616Y NB1		

Seasonal Energy

Description	Outdoor Unit	Indoor Unit	HU121MRB U30 (1Ø)	HU141MRB U30 (1Ø)	HU161MRB U30 (1Ø)
			HU123MRB U30 (3Ø)	HU143MRB U30 (3Ø)	HU163MRB U30 (3Ø)
Space Heating (According to EN14825)	Average Climate Water Outlet 35°C	SCOP	4.60	4.57	4.55
		Seasonal Space Heating Efficiency (η _s)	181	180	179
		Seasonal Space Heating Eff. Class (A+++ to D Scale)	A+++	A+++	A+++
	Average Climate Water Outlet 55°C	SCOP	3.50	3.47	3.45
		Seasonal Space Heating Efficiency (η _s)	137	136	135
		Seasonal Space Heating Eff. Class (A+++ to D Scale)	A++	A++	A++
Domestic Hot Water Efficiency (According to EN16147)	Average Climate	Declared Load Profile	L	L	L
		Water Heating Efficiency (η _{WH})	120	120	120
		SCOP _{DHW}	2.74	2.74	2.74
	Warmer Climate	Declared Load Profile	L	L	L
		Water Heating Efficiency (η _{WH})	151	151	151
		SCOP _{DHW}	3.43	3.43	3.43
	Colder Climate	Declared Load Profile	L	L	L
		Water Heating Efficiency (η _{WH})	101	101	101
		SCOP _{DHW}	2.34	2.34	2.34

Nominal Capacity and Nominal Power Input

Description	OAT (DB)	LWT (DB)	Outdoor Unit	HU121MRB U30 (1Ø)	HU141MRB U30 (1Ø)	HU161MRB U30 (1Ø)
				HU123MRB U30 (3Ø)	HU143MRB U30 (3Ø)	HU163MRB U30 (3Ø)
Nominal Capacity	Heating	7°C / 35°C	kW	12.00	14.00	16.00
		7°C / 55°C		11.00	11.50	12.00
		2°C / 35°C		11.00	12.00	13.80
	Cooling	35°C / 18°C		12.00	14.00	16.00
		35°C / 7°C		12.00	14.00	16.00
		7°C / 35°C		2.38	2.86	3.33
Nominal Power Input	Heating	7°C / 35°C	kW	3.79	4.04	4.29
		7°C / 55°C		3.01	3.31	3.83
		2°C / 35°C		2.53	3.26	4.00
	Cooling	35°C / 18°C		4.44	5.38	6.40
		35°C / 7°C		5.04	4.89	4.80
		7°C / 35°C		2.90	2.85	2.80
COP	Heating	7°C / 55°C	W/W	3.65	3.63	3.60
		2°C / 35°C		4.75	4.30	4.00
EER	Cooling	35°C / 18°C	W/W	2.70	2.60	2.50
		35°C / 7°C				

PRODUCT SPECIFICATION

R32 Hydrosplit IWT (Integrated Water Tank)

Product Specification (Outdoor Unit)

Technical Specification			Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30	HU123MRB U30	HU143MRB U30	HU163MRB U30
Operation Range (outdoor temp.)	Heating	Min. - Max.	°C DB	-25 - 35					
	Cooling								
Compressor	Quantity	EA							
	Type	Hermetic Sealed Scroll							
Refrigerant	Type	-							
	GWP (global warming potential)	R32							
	Precharged Amount	-							
	t-CO ₂ eq	675							
Piping Connections	Water Circuit	Inlet	mm (inch)	Male PT 1" according to ISO 7-1 (tapered pipe threads)					
		Outlet	mm (inch)	Male PT 1" according to ISO 7-1 (tapered pipe threads)					
Rated Water Flow Rate (at LWT 35°C)			LPM	34.5	40.3	46.0	34.5	40.3	46.0
Sound Power Level	Heating	Rated	dB(A)	61	62	63	61	62	63
	Cooling	Rated	dB(A)	53	54	55	53	54	55
Dimensions	Unit	W x H x D	mm	950 x 1,380 x 330					
	Weight		kg	91.7					
Power Supply	Voltage, Phase, Frequency		V, ∅, Hz	220-240, 1, 50			380-415, 3, 50		
	Rated	Heating	A	10.6	12.7	14.8	3.5	4.2	4.9
Wiring Connections	Running Current	Cooling	A	11.2	14.4	17.7	3.7	4.8	5.9
	Recommended Circuit Breaker		A	40			16		
Power Supply Cable (included earth, H07RN-F)			mm ² x cores	6.0 x 3C			2.5 x 5C		

Product Specification (Indoor Unit)


Technical Specification			Unit	HN1616Y NB1
Operation Range (Leaving Water Temperature)	Heating	Min. - Max.	°C DB	15 - 65
	Cooling			5 - 27 (16 - 27) ¹⁾
Domestic Hot Water Tank	DHW			15 - 80 ²⁾
	Volume		ℓ	200
Flow Sensor	Internal Thermal Protect Limit		°C	85
	Measuring Range	Min. - Max.	LPM	5 - 80
Expansion Vessel (Heating Circuit)	Water Pressure Sensor	Measuring Range	bar(G)	0 - 20
	Volume		ℓ	12
Safety Valve	Heating Circuit	Upper Limit	bar	3
	DHW Circuit	Upper Limit	bar	10
Electric Heater (Case 1 / Case 2 / Case 3) ³⁾	Type		-	Sheath
	Number of Heating Coil		EA	1 / 2 / 3
	Capacity combination		kW	2.0 / 2.0 + 2.0 / 2.0 + 2.0
	Heating Step		Step	1
	Power Supply		V, ∅, Hz	220-240, 1, 50 / 220-240, 1, 50 / 380-415, 3, 50
Piping Connections	Power Supply Cable (Included Earth, H07RN-F)		mm ² x cores	4.0 x 3C / 4.0 x 3C / 2.5 x 5C
	Rated Running Current		A	8.7 / 17.4 / 8.7
Wiring Connections	Water Circuit	Inlet	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
		Outlet	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
		Inlet from Outdoor Unit	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
		Outlet to Outdoor Unit	Inch	Female G 1" according to ISO 228-1 (parallel pipe threads)
		DHW Tank Water Circuit	Cold Inlet	Inch
Sound Power Level	Heating	Rated	dB(A)	43
				Dimensions
Weight			kg	130.0
	Exterior		Color / RAL Code	-
				White / RAL 9002

1) When fan coil unit not used.
 2) DHW 58-80°C Operating is available only when the booster heater is operating.
 3) The capacity of electric heater can be adjusted by wiring.

- Note
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national codes. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound power level is measured on the rated condition in according with ISO 9614 standard. Sound pressure level is converted from sound power level based on tonality penalty of 0dB and installation in free-field. Therefore, these values can be increased owing to ambient conditions during operation. Rated sound power level is according to the EN12102-1 under conditions of the EN14825.
 - Performances are based on the following conditions (It is according to EN14511):
 - Interconnected Pipe Length is standard length and difference of Elevation
 - This product contains Fluorinated greenhouse gases. (Outdoor - Indoor Unit) is 0m.

Accessory Parts (Optional Accessory)


Buffer Tank for Space Heating



As an optional accessory, the installer can install a standard 40ℓ buffer tank for space heating. Fitting seamlessly into the main casing, it can be attached on the backside of the indoor unit.

Buffer tank for space heating		Unit	OSHB-40KT.AEU
Water Volume		ℓ	40
Dimensions (W x H x D)		mm	518 x 560 x 175
Weight (w/o water)	Product	kg	24

Expansion Vessel for DHW

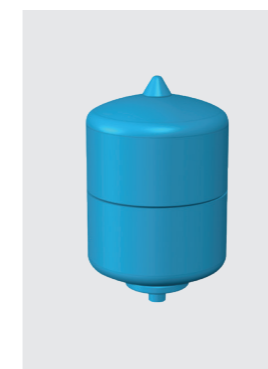

As an optional accessory, the installer can install a standard 8ℓ DHW expansion vessel that conveniently fits inside the indoor unit. It is provided with an accessory kit that includes a flexible connection tube.

Expansion vessel for DHW		Unit	OSHE-12KT.AEU
Expansion Volume		ℓ	8
Connection		inch	3/4
Max. Pressure		bar	10
Pre-charge		bar	3
Dimensions (W x H x D)		mm	416 x 238 x 502
Weight (w/o water)	Product	kg	2.5

Accessory Parts (Separately Provided)


Shut-off valve (1EA)



Shut-off valve with strainer (1EA)



Strainer



Technical Specification		Details
Material	Body	Brass
	Mesh	Stainless steel (STS304)
Mesh	Mesh No.	30
	Max. Particle Size	0.6mm
Piping Connection		Female G 1" according to ISO 228-1

PRODUCT SPECIFICATION

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	9.66	8.85	8.42	8.29	-	-	-	-
-20°C DB	10.13	10.00	9.88	9.75	9.63	-	-	-
-15°C DB	11.50	11.50	11.50	11.50	11.50	11.50	-	-
-7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	-
-4°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
-2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
2°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
7°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
15°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
18°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.04	9.21	8.76	8.62	-	-	-	-
-20°C DB	11.82	11.25	10.95	10.67	10.59	-	-	-
-15°C DB	12.52	12.90	13.26	12.88	12.81	12.63	-	-
-7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	-
-4°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
-2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
2°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
7°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
15°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
18°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 30 °C	LWT 35 °C	LWT 40 °C	LWT 45 °C	LWT 50 °C	LWT 55 °C	LWT 60 °C	LWT 65 °C
	TC	TC	TC	TC	TC	TC	TC	TC
-25°C DB	10.98	10.00	9.50	9.33	-	-	-	-
-20°C DB	13.43	12.54	12.03	11.78	11.47	-	-	-
-15°C DB	14.23	14.39	14.50	13.95	13.86	13.12	-	-
-7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	-
-4°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
-2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
2°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
7°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
15°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
18°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00

Note

- DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/min), TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
- Measuring procedure follows EN-14511.
 - Rated values are based on standard conditions and it can be found on specifications.
 - Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 - In accordance with the test standard (or nations), the rating will vary slightly.
- The shaded areas are not guaranteed continuous operation.

Performance Table for Cooling Operation

Maximum Cooling Capacity

HU121MRB U30 / HU123MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
	TC	TC	TC	TC	TC	TC	TC
10°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
20°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
30°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
35°C DB	12.00	12.00	12.00	12.00	12.00	12.00	12.00
40°C DB	11.75	12.00	12.00	12.00	12.00	12.00	12.00
45°C DB	11.50	12.00	12.00	12.00	12.00	12.00	12.00

HU141MRB U30 / HU143MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
	TC	TC	TC	TC	TC	TC	TC
10°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
20°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
30°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
35°C DB	14.00	14.00	14.00	14.00	14.00	14.00	14.00
40°C DB	13.75	14.00	14.00	14.00	14.00	14.00	14.00
45°C DB	13.50	14.00	14.00	14.00	14.00	14.00	14.00

HU161MRB U30 / HU163MRB U30 + HN1616Y NB1

Outdoor Temperature	LWT 7°C	LWT 10°C	LWT 13°C	LWT 15°C	LWT 18°C	LWT 20°C	LWT 22°C
	TC	TC	TC	TC	TC	TC	TC
10°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
20°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
30°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
35°C DB	16.00	16.00	16.00	16.00	16.00	16.00	16.00
40°C DB	15.75	16.00	16.00	16.00	16.00	16.00	16.00
45°C DB	15.50	16.00	16.00	16.00	16.00	16.00	16.00

Note

- DB : Dry Bulb Temperature (°C), LWT : Leaving Water Temperature (°C), LPM : Liters Per Minute (ℓ/min), TC : Total Capacity (kW)
- Direct interpolation is permissible. Do not extrapolate.
- Measuring procedure follows EN-14511.
 - Rated values are based on standard conditions and it can be found on specifications.
 - Above table values may not be matched according to installation condition. Except for rated value, the performance is not guaranteed.
 - In accordance with the test standard (or nations), the rating will vary slightly.
- The shaded areas are not guaranteed continuous operation.


PRODUCT SPECIFICATION

Drawings

Category	Unit	Model Name		
		Capacity (kW)		
		12.0	14.0	16.0
1 Phase Model 220 - 240V, 1Ø, 50Hz	Outdoor Unit	HU121MRB U30	HU141MRB U30	HU161MRB U30
	Indoor Unit	HN1616Y NB1		
3 Phase Model 380 - 415V, 3Ø, 50Hz	Outdoor Unit	HU123MRB U30	HU143MRB U30	HU163MRB U30
	Indoor Unit	HN1616Y NB1		

HU121MRB U30 / HU141MRB U30 / HU161MRB U30
HU123MRB U30 / HU143MRB U30 / HU163MRB U30


[Unit : mm]

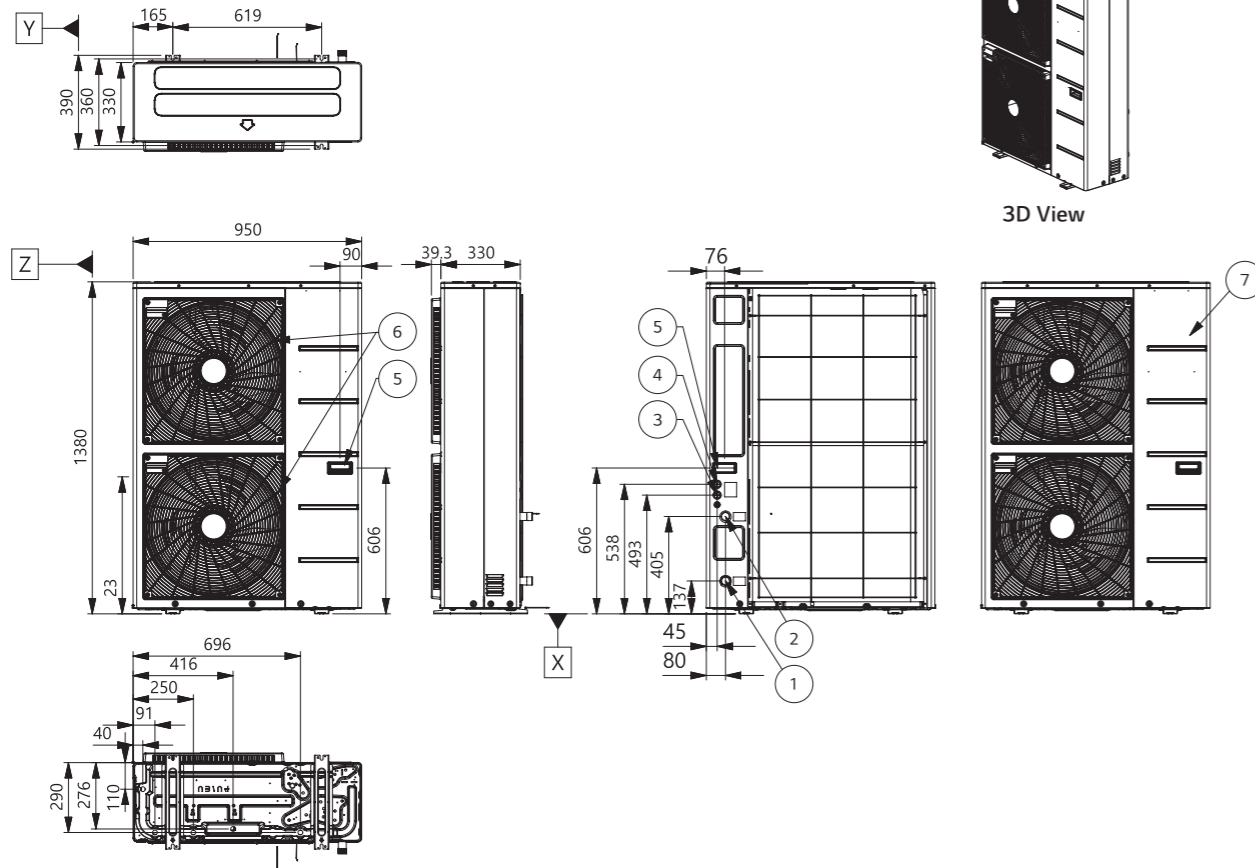

No.	Part Name	Description
1	Entering Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
2	Leaving Water Pipe	Male PT 1" according to ISO 7-1 (tapered pipe threads)
3	Unit Power	Power cable hole
4	Low Voltage	Communication cable hole
5	Handle	-
6	Air Outlet	-
7	Side Panel	-

HN1616Y NB1

[Unit : mm]

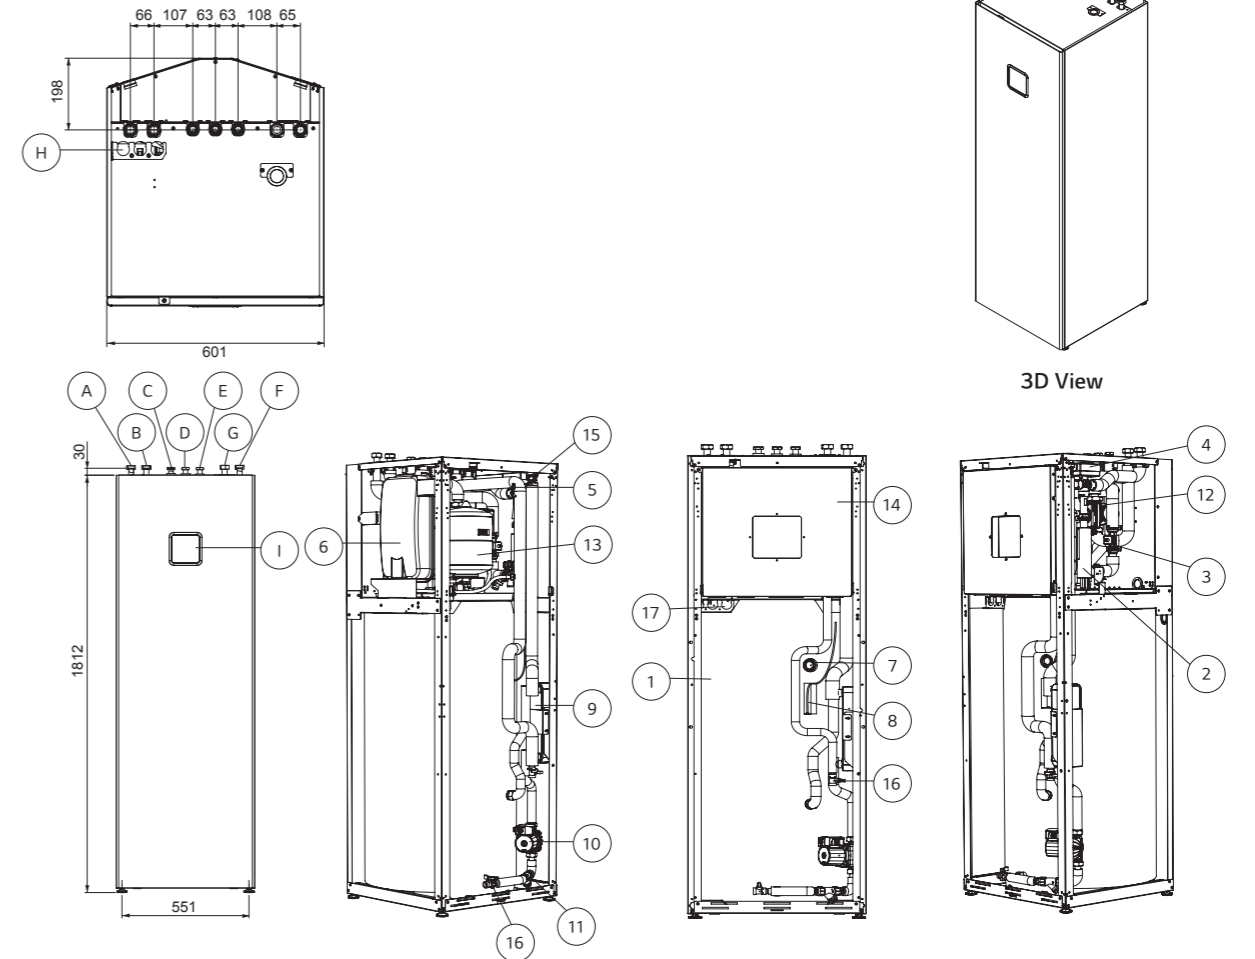

No.	Part Name	Description
1	Domestic hot water tank	200 L
2	Electric heater	Max 6 kW
3	Flow Sensor	SIKA VVX20 5-80 LPM
4	3 Way valve	Heating / DHW circuit
5	Water pressure sensor	SENSATA 2HMP
6	Expansion vessel	12 L for heating circuit
7	Magnesium anode	To prevent corrosion
8	DHW tank sensor	Temperature sensor
9	Plate heat exchanger	Heat exchange (Water / DHW tank)
10	DHW water pump	WILO ZRS 15/6-3
11	Strainer For DHW tank	Filtering and stacking particles
12	Main water pump	GRUNDFOS UPML 25-105 130 PWM A
13	Expansion vessel	8 L For DHW circuit (Accessory)
14	Control box	PCB and terminal blocks
15	Air vent	Air purging when charging water
16	Drain cock	Valve for water draining
17	Electrical conduits	For electric wiring










No.	Part Name	Part Name
A	Inlet pipe from outdoor unit	Female G1"
B	Outlet pipe to outdoor unit	Female G1"
C	Domestic hot water outlet pipe	Female G3/4"
D	Domestic cold water inlet pipe	Female G3/4"
E	Domestic re-circulation pipe	Female G3/4"
F	Heating circuit inlet pipe	Female G1"
G	Heating circuit outlet pipe	Female G1"
H	Electrical conduits	For electric wiring
I	Control panel	Built-in remote controller














THERMA V™
ACCESSORIES

ACCESSORIES





Accessories Provided by LG








Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Sensors	Room Temperature Sensor	PQRSTA0		All Therma V products	Room Temperature Based Control	To detect room air temperature for room temperature based control	• Max. wire length : 15m
	Thermistor for 2 nd Circuit or E/Heater	PRSTAT5K10		All except for High Temperature	2 nd Circuit (mixing circuit)	To detect 2 nd circuit temperature when using 2 nd circuit function	• 5kΩ thermistor, 10m
	Domestic Hot Water Sensor	PHRSTA0		All except for R32 Split IWT and R32 Hydrosplit IWT	Domestic Hot Water Heating	To detect DHW tank temperature	• Included in PHLTA kit
Valves	3 Way Valve	OSHA-3V		All except for R32 Split IWT and R32 Hydrosplit IWT	Domestic Hot Water Heating	To divert water flow between space heating and DHW heating	• Size : DN 20 G 1" connection, male threaded
	Thermostatic Mixing Valve	OSHA-MV OSHA-MV1		Regardless of model	Domestic Hot Water Supply	To blend hot water with cold water for ensuring constant, safe shower and bath outlet temp.	• Size : 3/4" DN20 male threaded • Size : 1" DN25 male threaded
DHW Tanks	Domestic Hot Water Tank (single coil)	OSHW-200F		All except for R32 Split IWT and R32 Hydrosplit IWT	Domestic Hot Water Heating	To generate and store domestic hot water	• Storage volume : 200L, 300L, 500L • Type : Internal single coil • Material : Stainless steel • Capacity of booster heater : 2.4kW
		OSHW-300F					
OSHW-500F							
Domestic Hot Water Tank (double coil)	OSHW-300FD		All except for R32 Split IWT, R32 Hydrosplit IWT and High Temperature	Domestic Hot Water Heating	To generate and store domestic hot water	• Storage volume : 300L • Type : Internal double coil • Material : Stainless steel • Capacity of booster heater : 2.4kW	
Installation Kits	Domestic Hot Water Tank Kit	PHLTA		R32 Split Hydro Box, R410A Split Hydro Box, R32 Hydrosplit Hydro Box	Domestic Hot Water Heating	To operate with DHW tank	• Parts included : DHW tank sensor (thermistor), Circuit breaker, Relay
		PHLTC		R410A Split Hydro Box (HN1639 NK3, 3Ø only)			
		PHLTB	R32 Monobloc, R32 Monobloc S	• Parts included : DHW tank sensor (thermistor), Circuit breaker, Relay, Multi harness			
	Solar Thermal Kit	PHLLA		R32 Monobloc, R410A Split Hydro Box (HN1616 NK3 / HN1639 NK3)	Solar Thermal Heat Utilization	To operate with solar thermal system	• Length of thermistor : 12m • Size of tube connector (W x H x D) : 110 x 55 x 22

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Installation Kits	Electric Back Up Heater	HA031M E1		R32 Monobloc, R32 Monobloc S	Capacity Back Up & Emergency Operation	To supplement insufficient capacity	• Heater capacity : 3kW • Number of heating coil : 1EA (3.0kW) • Size (W x H x D) : 210 x 607 x 217 • Power : 220 - 240V, 1Ø
		HA061M E1					• Heater capacity : 6kW • Number of heating coil : 2EA (3.0 + 3.0kW) • Size (W x H x D) : 210 x 607 x 217 • Power : 220 - 240V, 1Ø
		HA063M E1					• Heater capacity : 6kW • Number of heating coil : 3EA (2.0 + 2.0 + 2.0kW) • Size (W x H x D) : 210 x 607 x 217 • Power : 380 - 415V, 3Ø
	HA061C E1		R32 Hydrosplit Hydro Box (HN1600MC NK1)	Capacity Back Up & Emergency Operation	To supplement insufficient capacity	• Heater capacity : 6 kW • Number of heating coil : 2EA (3.0 + 3.0kW) • Power : 220-240 V, 1Ø	
HA063C E1		• Heater capacity : 6 kW • Number of heating coil : 3EA (2.0 + 2.0 + 2.0kW) • Power : 380 - 415V, 3Ø					
Vessel	Buffer Tank for Space Heating	OSHB-40KT		R32 Split IWT and R32 Hydrosplit IWT	-	To provide the buffer volume of water to the heating circuit	• Volume : 40L • Size (W x H x D) : 518 x 560 x 175
	Expansion Vessel for DHW	OSHE-12KT		R32 Split IWT and R32 Hydrosplit IWT	-	To absorb the volume changes by temperature of water for the DHW circuit	• Volume : 8L • Connection : 3/4" • Max. pressure : 10 bar • Size (W x H x D) : 416 x 238 x 502
ETC	Extension Wire for Wired Remote Controller	PZCWRC1		All Therma V products	-	To extend wire between wired remote controller and indoor unit	• Length : 10m
	Extension Cable for Wi-Fi Modem	PWYREW000		All Therma V products	Wi-Fi Control via LG ThinQ	To extend wire between Wi-Fi modem and indoor unit	• Length : 10m
	2 Remote Control Wire	PZCWRC2		All Therma V products	2 Remote Control	To connect two remote controller on the one indoor unit	• Length : 0.25m
	Drain Pan	PHDPB		R32 Split Hydro Box (HN0916M NK4), R410A Split Hydro Box (HN1616 NK3 / HN1639 NK3)	Cooling Operation	To collect condensed water in indoor unit when cooling operation	-
		PHDPC		R32 Hydrosplit, R32 Split Hydro Box (HN091MR NK5), R410A Split Hydro Box (HN1616M NK5 / HN1636M NK5)			
Cover Plate	PDC-HK10		R32 Hydrosplit Hydro Box, R32 Hydrosplit IWT, R32 Split Hydro Box, R32 Split IWT, R410A Split Hydro Box	-	To fill the blank space of the indoor unit front panel when the remote controller is relocated indoors.	-	

ACCESSORIES

Accessories Provided by LG

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Remote Controller	Wired Remote Controller	PREMTW101		All Therma V products	2 Remote Control	To control AWHP using two remote controller (additional remote controller)	<ul style="list-style-type: none"> New modern design 4.3 inch color LCD display Information displayed with simple graphic, icon & text Built-in temperature sensor Size (W x H x D) : 120 x 120 x 16 Extension cable (PZCWRC1, 10m) and 2 remote cable (PZCWRC2, 0.25m) are included
Central Controller	AC Ez Touch	PACEZA000		All Therma V products	Centralized Control	To control AWHP using LG central controller	<ul style="list-style-type: none"> 5 inch color display User-friendly control with iconographic interface (touch screen) Max. 32 unit control Total 200 schedule events (weekly / monthly / yearly / exception day) Operation history Remote controller lock (all, temp, mode) PC access supported (IPv6 supported) DI 1EA (emergency stop only) Size (W x H x D) : 137 x 121 x 25
	AC Smart 5	PACS4B000 (Smart 4) PACS5A000 (Smart 5)					<ul style="list-style-type: none"> 10.2 inch color display User-friendly control with iconographic interface (touch screen) (Smart 4)_Max. IDU 32, (Smart 5)_Max. IDU 64 Total 100 schedule events (weekly / monthly / yearly / exception day) History / operation trend Interlock with 3rd party equipment (ACS IO, ACU IO module is needed) Error alarm by e-mail Remote controller lock (all, temp, mode) Map view (visual navigation) Web access supported with HTML5 (PC, smartphone, tablet) DI 2EA, DO 2EA BACnet IP/modbus TCP protocol support Size (W x H x D) : 253.2 x 167.7 x 28.9
	ACP 5	PACP4B000 (ACP4) PACP5A000 (ACP5)					<ul style="list-style-type: none"> Web access controller Max. 128 unit control Total 100 schedule events (weekly / monthly / yearly / exception day) History / operation trend Interlock with 3rd party equipment (ACS IO, ACU IO module is needed) Error alarm by e-mail Remote controller lock (all, temp, mode) Map view (visual navigation) DI 10EA, DO 4EA BACnet IP/modbus TCP protocol support Size (W x H x D) : 270 x 155 x 65

Category	Model Name	Model Number	Figure	Applicable Product	Relevant Function	Purpose	Feature
Gateway	ACP Lonworks	PLNWKB000		All Therma V products	Centralized Control	To link with AWHP and other existing building control system	<ul style="list-style-type: none"> Web access controller Max. 64 unit control ACP function included Lonworks protocol support Size (W x H x D) : 270 x 155 x 65
	Modbus RTU Gateway	PMBUSB00A				To communicate and control through the central controller (providing modbus RTU connection between AWHP and BMS)	<ul style="list-style-type: none"> Modbus RTU slave (RS485) / 9,600 bps Size (W x H x D) : 53.6 x 89.7 x 60.7 Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules Power : DC 12V
Dry Contact	PI485 Gateway for Therma V	PP485A00T		All Therma V products	-	To communicate and control through the central controller (converting LG protocol to RS485 protocol)	<ul style="list-style-type: none"> 1 for each outdoor unit Power : Supplied by outdoor unit
	Simple Dry Contact	PDRYCB000				To connect between the AWHP and external devices to control various functions	<ul style="list-style-type: none"> 1 Set per 1 unit 1 Input contact for turning on/off Input power : 220 ~ 240V 2 output contacts - Operation status - Error status
ETC	Dry Contact for Thermostat	PDRYCB320		All Therma V products	-		<ul style="list-style-type: none"> 1 Set per 1 unit Non voltage or 12 ~ 24V 8 digital input contacts for thermostat - On/off operation mode, DHW heating - Emergency mode, silent mode 2 Output contacts - Operation status - Error status
	LG Wi-Fi Modem	PWFMDD200				Wi-Fi Control via LG ThinQ	To control AWHP via smartphone
	Meter Interface	PENKTH000			Energy Monitoring	To measure production / consumption power	<ul style="list-style-type: none"> Energy meter interface to monitor Electricity and Heat energy - Max. 3 watt - Hour meter - Max. 1 heat meter - Pulse width : 40ms ~ 100ms Modbus RTU comm. with THERMA V - 2 wire RS485 / 9600bps Power : DC 12V Size (W x H x D) : 54 x 90 x 61

Note
1. PI485 Gateway (PP485A00T) should be installed on outdoor unit to use central controller.
For more details, please refer to the installation manual of each product.

LG Wi-Fi Modem

PWFMDD200 ENCXLEU

Access LG THERMA V anytime and from anywhere with Wi-Fi equipped device. LG's exclusive Home Appliances control app (LG ThinQ) is available.

Simple operation for various functions.

- On/off
- Operation mode selection
- Current temperature
- Set temperature
- On/off reservation scheduling
- Energy monitoring
- ESS monitoring
- Silent mode reservation
- Holiday mode
- Quick DHW heating



Model Name	PWFMDD200
Size (mm)	46 x 68 x 14
Interfaceable Products	All THERMA V Line-ups except for R410A IWT
Connection Type	Indoor Unit 1 : 1
Communication Frequency	2.4GHz
Wireless Standards	IEEE 802.11b/g/n
Mobile Application	LG ThinQ (Android v4.1 (Jellybean) or higher, iPhone iOS 9.0 or higher)
Optional Extension Cable	PWYREW000 (10m extension)

Note

1. Functionality may be different according to each Indoor model.
2. User interface of application shall be revised for its design and contents improvement.
3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.
 - For the compatibility with indoor unit, please contact regional office.